

CONTRAFLAM[®] STRUCTURE LITE 30

Fire resistant safety glass for interior application

CLASSIFICATION

EW = Integrity +
Radiation reduction

Ability to withstand fire exposure without transmission of fire to the non-fire side as a result of the passage of flames or hot gases, thereby causing ignition of the non-fire exposed surface or materials adjacent. Also maintains radiated heat in front of the glazing below a specified level to provide for safer separation distances and escape ways.


PRODUCT FEATURES

Fire resistant safety glass
in a toughened safety glass make-up

Edge Sealant

Intumescent material***

Silicone Sealant***

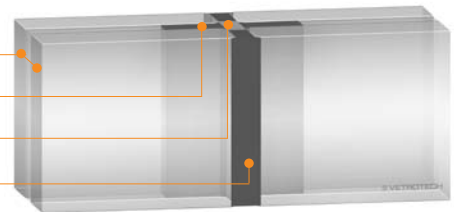

TECHNICAL SPECIFICATIONS

Fire resistance (EN 13501-2)

Reaction to fire (EN 13501-1)

Production height (Standard/Maximum)

Maximum Glass Size

Thickness tolerance

Length tolerance

Impact resistance (EN 12600)

UV stability (EN ISO 12543-4 point 6)

Edge quality outer pane

Application Conditions

CE certificate No. of conformity

Hazardous material contained

Assembly

EW 30

A2-s1, d0

≤ 3210 mm/≤ 3800 mm

Variable, subject to glass make-up, framing material or glazed element type. Refer to applicable fire test evidence, national certification and EXAP allowance. Consult with your Vetrotech representative.

+2/-1 mm

±2 mm

1 (B) 1 classification

In addition to the standard specifications: no formation of bubbles or yellowing after 2000 hours of exposure to radiation.

Polished edge in conformance with EN 12150-1

Avoid prolonged exposure to extreme temperatures. Exterior applications must be supplied as an IGU with Low-E or Solar Control coating. For more information consult your Vetrotech representative or refer to "Quality Guideline, Application Conditions".

0336-CPD-5064C/ID No.* (you can obtain a DoP*** from your national sales office) - AoC-level 1

None

According to the instruction guideline

Nominal thickness

20 mm

Glass size per thickness

≤ 2300 x 3800 mm

Weight (max. 500 kg/pane)

46 kg/m²

Sound reduction Rw (EN 140-3)

39 dB

Light transmission (EN 410)

84%

Light reflection ρL (outside/inside)

8%/8%

U value, W/m²K (EN 673)

4,9

g value

0,68

Energy transmission τE

61%

Energy reflection ρE (outside/inside)

7%/7%

* ID No. = Identification number for the relevant manufacturing site

** Declaration of Performances

*** Use only approved material according the instruction guideline